


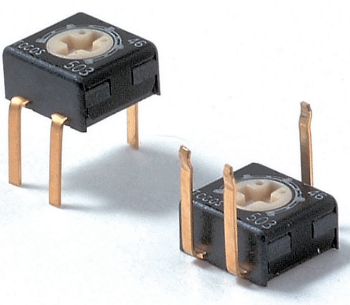







● 表面実装形トリマポテンショメータ/金属皮膜 Surface Mount, Cermet Trimmer Potentiometers

	G3 Series	G43 Series	GV4 Series
シリーズ名 Series Model			
回転数、回転角度 Adjustment Travel	Single-Turn 250° ±10°	Single-Turn 240° ±10°	Multi-Turn 12±2 Turns
形状概要とシール性 Size & Construction	3mm Square Sealed SMD	4mm Square Sealed SMD	4mm Square Sealed SMD
全抵抗値範囲 Resistance Range	50Ω~2MΩ	10Ω~2MΩ	10Ω~2MΩ
抵抗値許容範囲 Resistance Tolerance	±20%	±20% (Standard) ±10% (Optional)	±20% (Standard) ±10% (Optional)
定格電力 Power Rating	0.125W at 70°C 0W at 125°C	0.25W at 70°C 0W at 125°C	0.25W at 85°C 0W at 150°C
使用温度範囲 Operating Temp. Range	-55°C~125°C	-55°C~+125°C	-65°C~+150°C
ページ Catalog Page No.	33	38	46

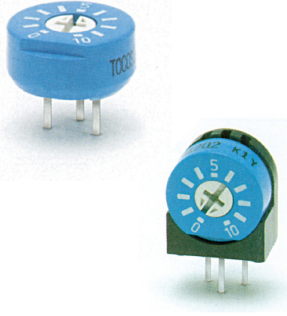
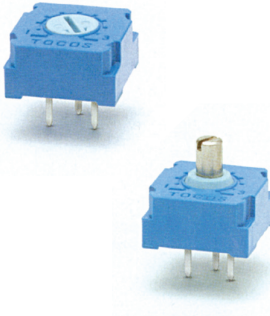
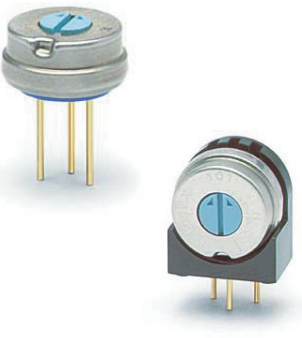
● 単回転型トリマポテンショメータ/金属皮膜 Single-Turn, Through-Hole, Cermet Trimmer Potentiometers

	G43C Series	GF04 Series	RJC06 Series
シリーズ名 Series Model			
回転数、回転角度 Adjustment Travel	Single-Turn 240° ±10°	Single-Turn 230° ±10°	Single-Turn 250° ±10°
形状概要とシール性 Size & Construction	4mm Square Sealed Through-Hole	φ 4.8 (mm) Sealed Through-Hole	φ 6.2 (mm) Sealed Through-Hole
全抵抗値範囲 Resistance Range	10Ω~2MΩ	100Ω~1MΩ	10Ω~1MΩ
抵抗値許容範囲 Resistance Tolerance	±20% (Standard) ±10% (Optional)	±20% (Standard) ±10% (Optional)	±20% (Standard) ±10% (Optional)
定格電力 Power Rating	0.25W at 70°C 0W at 125°C	0.5W at 70°C 0W at 125°C	0.5W at 70°C 0W at 125°C
使用温度範囲 Operating Temp. Range	-55°C~+125°C	-55°C~+125°C	-55°C~+125°C
ページ Catalog Page No.	38	51	69

● 単回転型トリマポテンショメータ／金属皮膜 Single-Turn, Through-Hole, Cermet Trimmer Potentiometers

	GF063 and GF063-K Series	RG063 Series	RGP10 Series
シリーズ名 Series Model			
回転数、回転角度 Adjustment Travel	Single-Turn 250° ±10°		Single-Turn 200° ±10°
形状概要とシール性 Size & Construction	6.8Square Sealed Through-Hole	6.8Square Through-Hole	10mm Square Through-Hole
全抵抗値範囲 Resistance Range	10Ω～2MΩ		100Ω～1MΩ
抵抗値許容範囲 Resistance Tolerance	±20% (Standard) ±10% (Optional)		±20%
定格電力 Power Rating	0.5W at 70°C 0W at 125°C		0.5W at 70°C 0W at 100°C
使用温度範囲 Operating Temp. Range	-55°C～+125°C		-40°C～+100°C
ページ Catalog Page No.	54	63	72

● 単回転型トリマポテンショメータ／金属皮膜&巻線 Single-Turn, Through-Hole, Cermet and Wirewound Trimmer Potentiometers

	G12 Series	GF12 Series	RA12 Series
シリーズ名 Series Model			
回転数、回転角度 Adjustment Travel	Single-Turn 300° ±10°	Single-Turn 300° ±10°	Single-Turn 300° ±10°
形状概要とシール性 Size & Construction	φ 12.6 (mm) Sealed Through-Hole	12mm Square, Metal&Plastic Shaft Sealed Through-Hole	φ 12.5 (mm) Sealed Through-Hole
全抵抗値範囲 Resistance Range	10Ω～1MΩ	10Ω～1MΩ	10Ω～20kΩ
抵抗値許容範囲 Resistance Tolerance	±20% (Standard) ±10% (Optional)	±20% (Standard) ±10% (Optional)	±10%
定格電力 Power Rating	1W at 70°C 0W at 125°C	0.75W at 70°C 0W at 125°C	0.5W at 70°C 0W at 125°C
使用温度範囲 Operating Temp. Range	-55°C～+125°C	-55°C～+125°C	-55°C～+125°C
ページ Catalog Page No.	75	78	81

カタログをご利用
いただくにあたり

トリマポテンショメータ

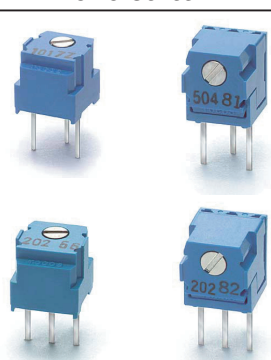
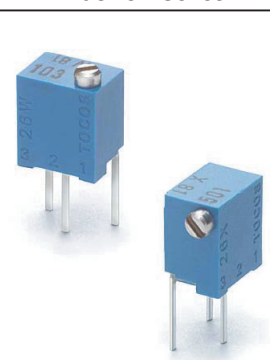

ポテンショメータ
通産機器用

ポテンショメータ
高回転寿命形

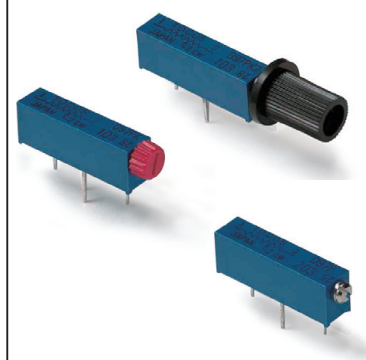
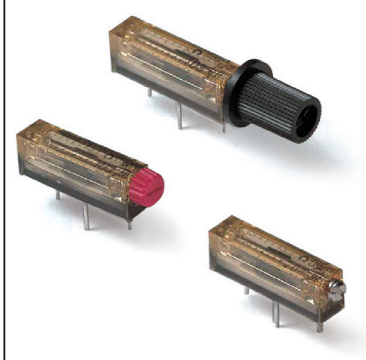
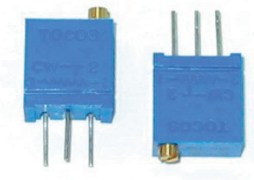
ポテンショメータ
可変抵抗減衰器

ポテンショメータ
民生機器用

● 多回転型トリマポテンショメータ／金属皮膜 Multi-Turn, Through-Hole, Cermet Trimmer Potentiometers

	GV6 Series	RJC261 Series	RJC07 Series
シリーズ名 Series Model			
回転数 Adjustment Travel	2 Turns (735° ±10°)	11Turns ±1Turn	13Turns ±3Turns
形状概要とシール性 Size & Construction	6.8mm Square Sealed Through-Hole	6W×6.75H×4.3T (mm) Sealed Through-Hole	7W17.5H×6.6T (mm) Sealed Through-Hole
全抵抗値範囲 Resistance Range	10Ω～1MΩ	10Ω～2MΩ	100Ω～1MΩ
抵抗値許容範囲 Resistance Tolerance	±20% (Standard) ±10% (Optional)	±20% (Standard) ±10% (Optional)	±20% (Standard) ±10% (Optional)
定格電力 Power Rating	0.5W at 70°C 0W at 125°C	0.25W at 70°C 0W at 125°C	0.75W at 40°C 0W at 125°C
使用温度範囲 Operating Temp. Range	-55°C～+125°C	-55°C～+125°C	-55°C～+125°C
ページ Catalog Page No.	87	84	90

● 多回転型トリマポテンショメータ／金属皮膜 Surface Mount, Cermet Trimmer Potentiometers

	RJC097 Series	RJC094 Series	J9 Series
シリーズ名 Series Model			
回転数 Adjustment Travel	15Turns ±3Turns		20Turns
形状概要とシール性 Size & Construction	4.7W×19L×6.4H (mm) Sealed Through-Hole		5×10.4×5.2 (mm) Sealed Through-Hole
全抵抗値範囲 Resistance Range	10Ω～1MΩ		10Ω～2MΩ
抵抗値許容範囲 Resistance Tolerance	±20% (Standard) ±10% (Optional)		±10%
定格電力 Power Rating	0.75W at 70°C 0W at 125°C		0.5W at 85°C 0W at 125°C
使用温度範囲 Operating Temp. Range	-55°C～+125°C		-55°C～+125°C
ページ Catalog Page No.	93		96